


RT Series Regenerative Turbine Cooling Pumps

RT Series Regenerative Turbine Cooling Pumps are precision-engineered for pumping liquid refrigerant through a cooling system loop, directly to blade servers and chips, ensuring heat removal. Delivering high efficiency, extended life, and quiet operation – this hermetically sealed regenerative turbine pump is designed with high-pressure and low flow rates in mind, making it ideal for high-density data center racks.

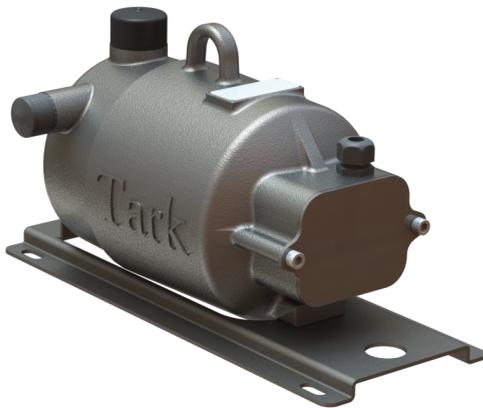

RT Series Regenerative Cooling Pumps Benefits

- High-pressure pump with low energy intake
 - 600 PSI operating pressure
 - 2,500 PSI construction pressure
- Power Supply - 3 Phase, 400/460V AC, 50/60 Hz
- Flow Rate 0-36 GPM
- Quality material selection to ensure longevity and no leaching
- Compact footprint to minimize space claim
- Precise operating controls
- Low decibel operation


The RT Series Advantage

- Tailor-made for high-density cooling and immersion applications
- Designed for HPC cooling
- Reduced footprint maximizing available rack space
- Life expectancy optimized for 80,000 hours
- Increased durability via optimized flow path and minimized wetted material wear
- Low energy consumption and power draw
- Precision motor controls that optimize cooling performance
- Low maintenance design with easy service accessibility


The RT Series Applications




Coolant
Distribution
Units



Immersion
Cooling



High
Performance
Computing
Environments

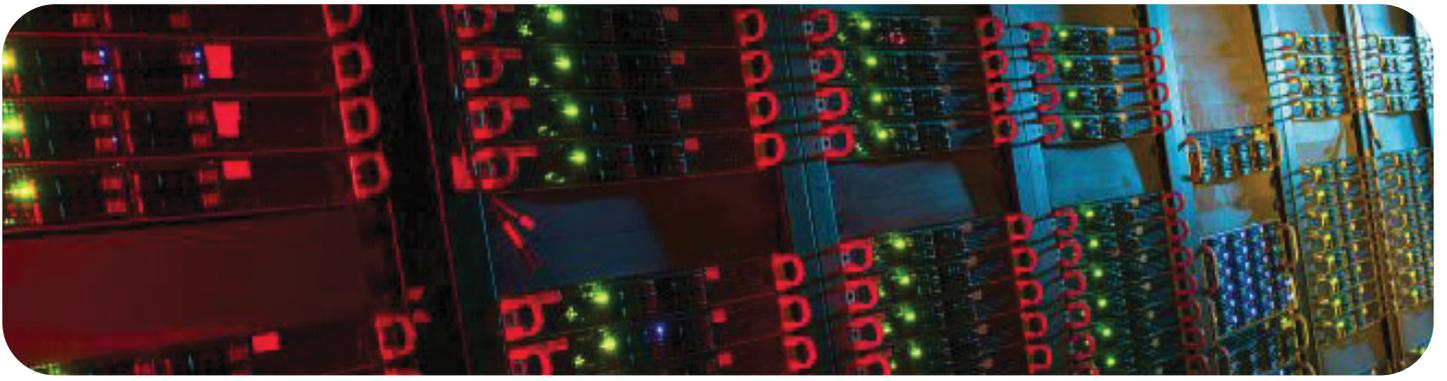

RT Series Regenerative Cooling Pump Specifications

PERFORMANCE

RT Series			
Input Voltage	400 VAC 50 Hz	460 VAC 60 Hz	380 VAC 60 Hz
Power	5HP (3.7kW)	5HP (3.7kW)	COMING IN 2026
Variable Speed (RPM)	3000	3450	
Flow Rate Range (GPM)	0-30	0-36	
Pressure Range (PSI)	0-150	0-150	
Inlet*	2 1/4" – 12 Rotalock	2 1/4" – 12 Rotalock	
Discharge*	1 3/4" – 12 Rotalock	1 3/4" – 12 Rotalock	
Reliability	10 Year Life		
Max Temperature (°C)	60		

*Customization available upon request

WETTED MATERIAL

SHAFT	HOUSING	BEARINGS	IMPELLER	CASING
ASTM A108 4140	304SS	Hybrid Ceramic	Brass	Brass

MATERIAL COMPATIBILITY

R134a / R515B / R471A / R1234ze (E) / R1234yf

